

Ku-Band Antenna-Mount SSPAs

PKM, PKO14SxxLA

These high power solid-state amplifiers offer output powers of 25, 35, 50, 70 or 100 watts across the standard 14.0 to 14.5 GHz ("M") or extended 13.75 to 14.5 GHz ("O") satellite uplink bands. Housed in a compact weatherproof enclosure, the amplifiers can be mounted in an antenna hub or outdoors in applications where it is desirable to reduce cable losses by mounting the SSPA close to the antenna. The amplifiers feature a microprocessor-based M&C system that facilitates easy setup and control.


Options

- 1:1 and 1:2 redundant systems
- Integrated block upconverter with L-band input

Features

- 25/35/50/70/100 W saturated output power
- 70/75 dB gain
- Built-in monitor and control
- Temperature-compensated gain from -40 to +50 °C
- Serial interface (RS-232/-422/-485)
- Output isolator for high load VSWR protection
- 20 dB range digital gain adjustment
- RF output sample port (-40 dBc)
- Output power monitor
- Extremely light weight, nominally 36 lb (16 kg)
- Mounts on small antennas

SSPA Outline Drawing

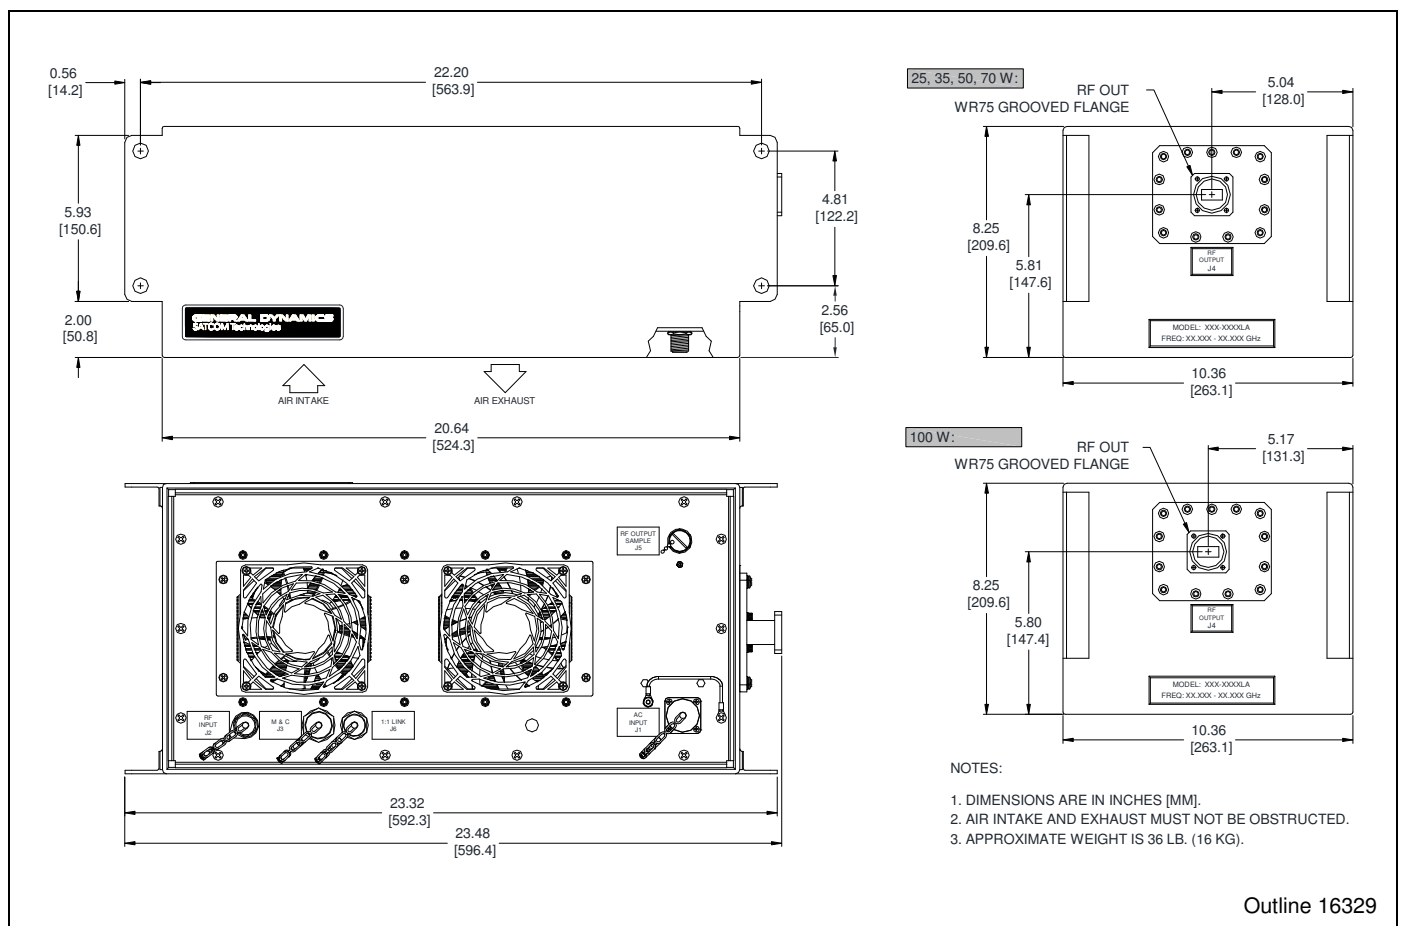


Single-Thread SSPA Specifications

Parameter	Notes	Min.	Nom./Typ. [†]	Max.	Units
Frequency Range	Band 'M' Band 'O'	14.00 13.75		14.50 14.50	GHz GHz
Input Frequency Range with Option 7, Block Upconverter	Band "M" Band "O"	950 950		1450 1700	MHz MHz
Gain, at maximum gain setting	25 W, 35 W 50 W, 70 W, 100 W	70 75			dB dB
Gain Adjust Range		20			dB
Gain Flatness	Full band, standard Full band, with Option 7 Per 40 MHz, standard Per 40 MHz, with Option 7			±1.0 ±1.5 ±0.3 ±0.5	dB dB dB dB
Gain Stability vs. Temperature	-40 to +50 °C, standard -40 to +50 °C, with Option 7		±1.0 ±2.0	±1.5 ±2.5	dB dB
Saturated Power Output (See Note 1)	25 W 35 W 50 W 70 W 100 W		+44 (25) +45.5 (35) +47 (50) +48.5 (70) +50 (100)		dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Power Output, at 1 dB compression (P _{1dB}) (See Note 1)	25 W 35 W 50 W 70 W 100 W	+43 (20) +44.5 (28) +46 (40) +47.5 (56) +49.3 (85)			dBm (W) dBm (W) dBm (W) dBm (W) dBm (W)
Two-tone Intermodulation	At 3 dB total backoff from 1 dB compression point		-30	-25	dBc
Group Delay	Linear Parabolic Ripple			0.03 0.003 1.0	ns/MHz ns/MHz ² ns p-p
AM/PM Conversion	At P _{1dB}		2.5	3.5	°/dB
Noise Figure	At maximum gain, standard At max. gain, with Option 7		8 20		dB dB
VSWR	Input Input, with Option 7 Output		1.20 1.35 1.20	1.30 1.50 1.30	:1 :1 :1
Noise Power Density	At max. gain 13.75–14.50 GHz 10.70–12.75 GHz (25–70 W) 10.70–12.75 GHz (100 W)			-75 -160 -155	dBm/Hz dBm/Hz dBm/Hz
Output Sample Port Connectors	Input Output Sample Port I/O Power		-40 Type N Female WR75G Waveguide Type N Female 10-pin MS, mate supplied 3-pin MS, mate supplied		dBc
Power Requirements	Voltage Frequency Power, 25 W Power, 35 W Power, 50 W Power, 70 W Power, 100 W Power factor corrected	100 47		242 63 375 475 675 750 1200	Vac Hz W W W W W
Cooling System			Forced air		
Operating Temperature Range	Ambient air temperature	-40		+50	°C
Weight			36 (16)		lb (kg)
Dimensions	See outline drawing		8.25 x 23.48 x 10.36 210 x 596 x 263		inches mm

[†] When there is only one value on a line, the Nom./Typ. column is a nominal value; otherwise it is a typical value. Typical values are intended to illustrate typical performance, but are not guaranteed.

NOTE 1: Between 14.0 and 14.5 GHz; 1 dB lower between 13.75 and 14.0 GHz for Band "O" amplifiers.

Typical 1:1 Redundant System Outline Drawing

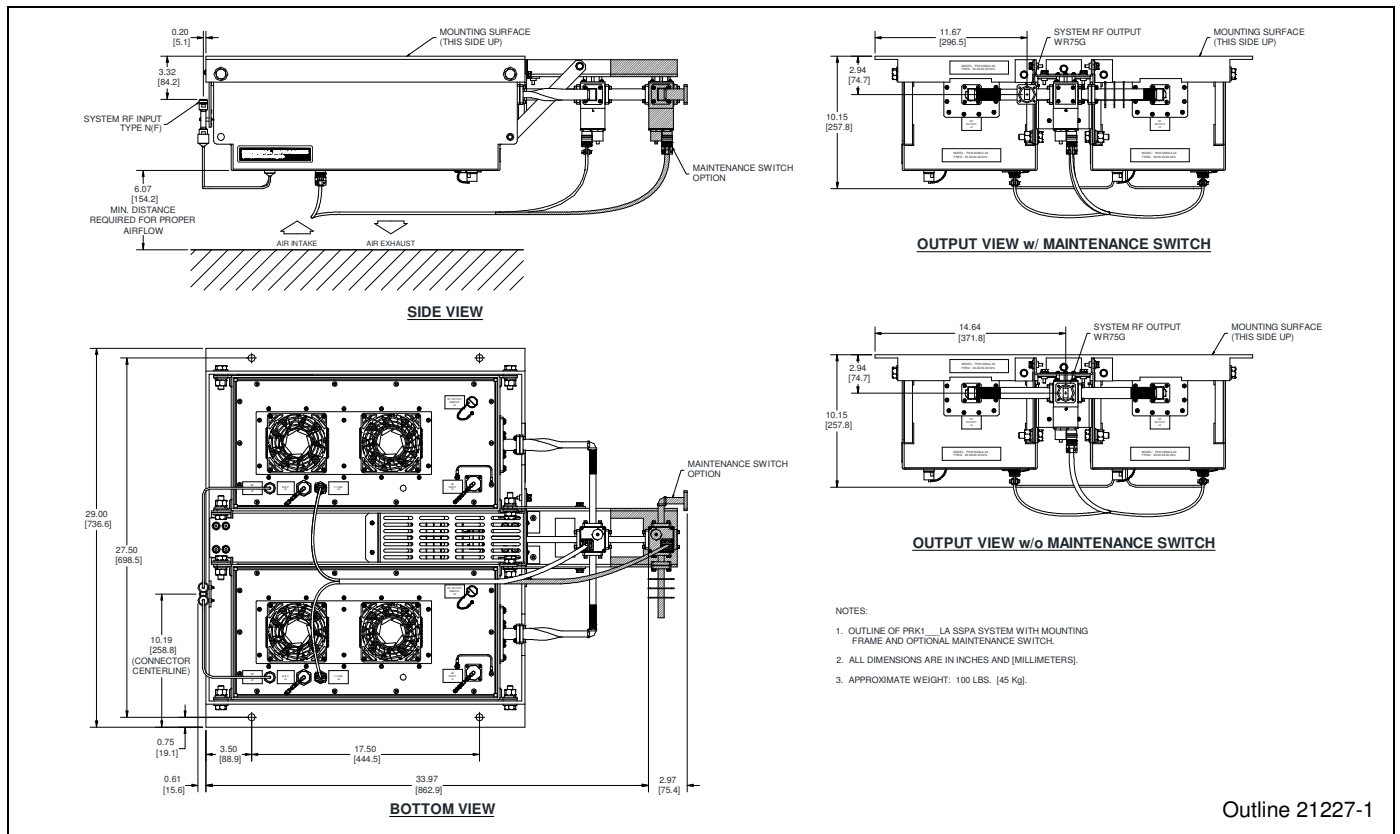

Part Number/Ordering Information

SSPA:

Part/Model No. PK 14S LA-XX

14.00–14.50 GHz = M

13.75–14.50 GHz = O

25 Watts = 25

35 Watts = 35

50 Watts = 50

70 Watts = 70

100 Watts = 100

Option:

1:1 Redundancy 4

Redundant Capability
(required for units in 1:1 systems)

Block Upconverter 7

L-Band IF Input

1:1 Redundant Systems* (Consists of 1:1 switching assembly, two SSPAs, and interconnecting cables):

Part/Model No. PRK1 LA-XX

14.00–14.50 GHz = M

13.75–14.50 GHz = O

25 Watts = 25

35 Watts = 35

50 Watts = 50

70 Watts = 70

100 Watts = 100

Options:

Block Upconverter 7

L-Band IF Input

Maintenance Switch A

Selects antenna or dummy load at system output

* Performance specifications of a redundant system depend on the installed configuration and optional accessories. Contact the factory for more information and for 1:2 system capabilities.

Related Accessory:

RCP-2001, SSPA Remote Control Panel

1U-high rack-mount panel enables remote manual control of the SSPA. Can be located up to 1.3 km (4000 ft.) away and interconnects with inexpensive cable. (One panel is required for each SSPA in a redundant system, for full remote manual control.)



Other Products

- Solid-State Power Amplifiers and SSPA Systems
- Solid-State Power BUCs and SSPB Systems
- Low Noise Amplifiers and LNA Systems
- Low Noise Block Converters and LNB Systems
- Block Up and Block Down Converters
- Synthesized Converters
- Line Drive Amplifiers
- Power Supply Monitors
- Redundant Control Panels for SSPAs, SSPBs, and LNAs

GENERAL DYNAMICS SATCOM Technologies

60 Decibel Road, Suite 200 • State College, PA 16801 USA • Tel. +1-814-238-2700 • FAX +1-814-238-6589
Email: satcom@gd-ms.com • www.gdsatcom.com/electronics.php

16667 Rev. F

© 2016 General Dynamics. All rights reserved. General Dynamics reserves the right to make changes to its products and specifications at any time and without notice. All trademarks indicated as such herein are trademarks of General Dynamics. All other product and service names are the property of their respective owners.