


Optribution® Basic L-Band Link DEV 7231 & DEV 7331

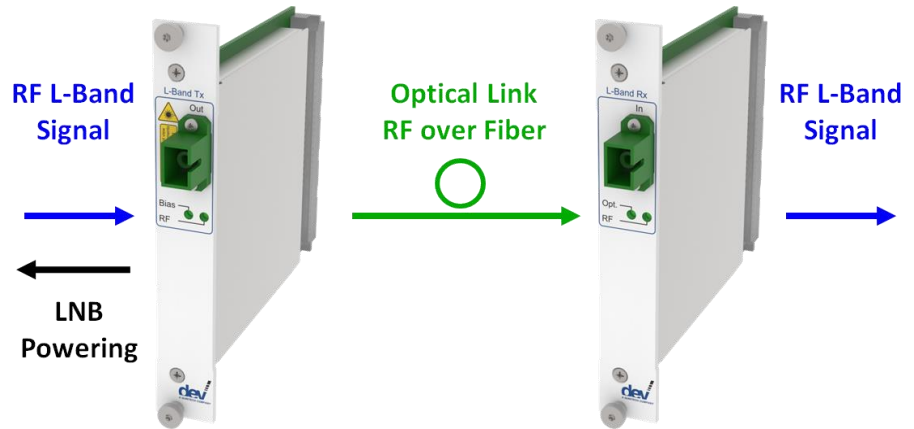

The final product may vary from the above image depending on the options selected.

Products:

- | | |
|-----------------|--|
| DEV 7231 | Basic Optribution® Transmitter; 950...2150 MHz; SC/APC |
| DEV 7331 | Basic Optribution® Receiver; 950...2150 MHz; SC/APC |

Features:

- ▀ Recommended for RF-over-Fiber Links with optical Losses up to 10 dB
- ▀ Fixed Gain
- ▀ RF Sensing with Status LED
- ▀ LNB Power with Current Monitoring and Status LED
- ▀ Optical Connector Type SC/APC (optional FC/APC or E2000 HRL)

Link Specifications DEV 7231 & DEV 7331

	Value	Condition
Frequency Range	950...2150 MHz	
Max. Link Gain	4±3 dB	
Flatness	±1.5 dB ±0.2 dB	950...2150 MHz In any 36 MHz window
Return Loss	>14 dB, typ. 16 dB	
Gain Stability	±2 dB	0...+50 °C / 32...122 °F
Group Delay Distortion	<2 ns	
Nominal RF Input Level	-10 dBm	Total power
Noise Figure	24 dB	
SFDR _{2/3}	107 dBc	Note 1
CNR	59 dB	Notes 2, 3, 4
Output IP3	16 dBm	
OP1dB	-1 dBm	
Intermodulation Distortion	>40 dBc	@ 2 tones, -13 dBm each
Input Power dynamic Range	-45...-6 dBm	Total power
Damage RF Input Level	12 dBm	Total power
Maximum allowable optical Losses	23 dB	

Note 1: $P_{in} = -15$ dBm, $IM3 = 48$ dBc

Note 2: $P_{in} = -15$ dBm

Note 3: 36 MHz window

Note 4: with back to back fiber connection (2 m) and minimum noise figure

Technical Data DEV 7231 & DEV 7331

	Value	Condition
Common Optical Specifications		
Fiber Type	Single Mode 9/125 μm	
Optical Connector	SC/APC, E2000/HRL, or FC/APC	Standard is SC/APC
Tx Specifications (DEV 7231)		
Laser Type	DFB	
Laser Class (according to IEC 60 825-1)	Class 1M (low Risk to Eyes, no Risk to Skin)	
Optical Power Output	1 mW / 0 dBm	
Power Consumption	15 V; 200 mA	Without LNB power
Weight	~0.5 kg	
Tx LNB Power & Current Monitoring		
LNB Power	18+0/-3 V; max. 500 mA	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Rx Specifications (DEV 7331)		
Wavelength Range	1100...1650 nm	
Min. optical Input Level (optical Sensitivity)	-22 dBm	
Damage optical Input Level	+10 dBm	
Power Consumption	15 V; 200 mA	
Weight	~0.3 kg	
Tx & Rx RF Sensing		
Adjustable Threshold Level (THL)	0 dBm > THL > -50 dBm (Factory Setting: -30 dBm)	
Threshold Level Accuracy	±3 dB	
Threshold Repeatability	<0.5 dB	
Alarm Indication	Via LED on the Front Panel & via Remote Communication	
Tx & Rx General Specification		
Size	4 HP (20 mm) Width, 3 RU (133 mm) Height, 3.94" (100 mm) Depth	
Environmental Conditions	ETS 300019 Part 1-3 Class 3.1	

Order Information

Products	
DEV 7231	Basic Optribution® Transmitter; 950...2150 MHz; SC/APC
DEV 7331	Basic Optribution® Receiver; 950...2150 MHz; SC/APC

Optical Connector Options	
Option 07	FC/APC Optical Connector
Option 08	E2000/HRL Optical Connector

Contact

DEV Systemtechnik GmbH & Co. KG
Grüner Weg 4A
61169 Friedberg
GERMANY
Phone: +49 6031 6975 100
Fax: +49 6031 6975 114
info@dev-systemtechnik.com
www.dev-systemtechnik.com

Rev. 13-Dec-2016

Technical specifications are subject to change